


# Retrocomputing

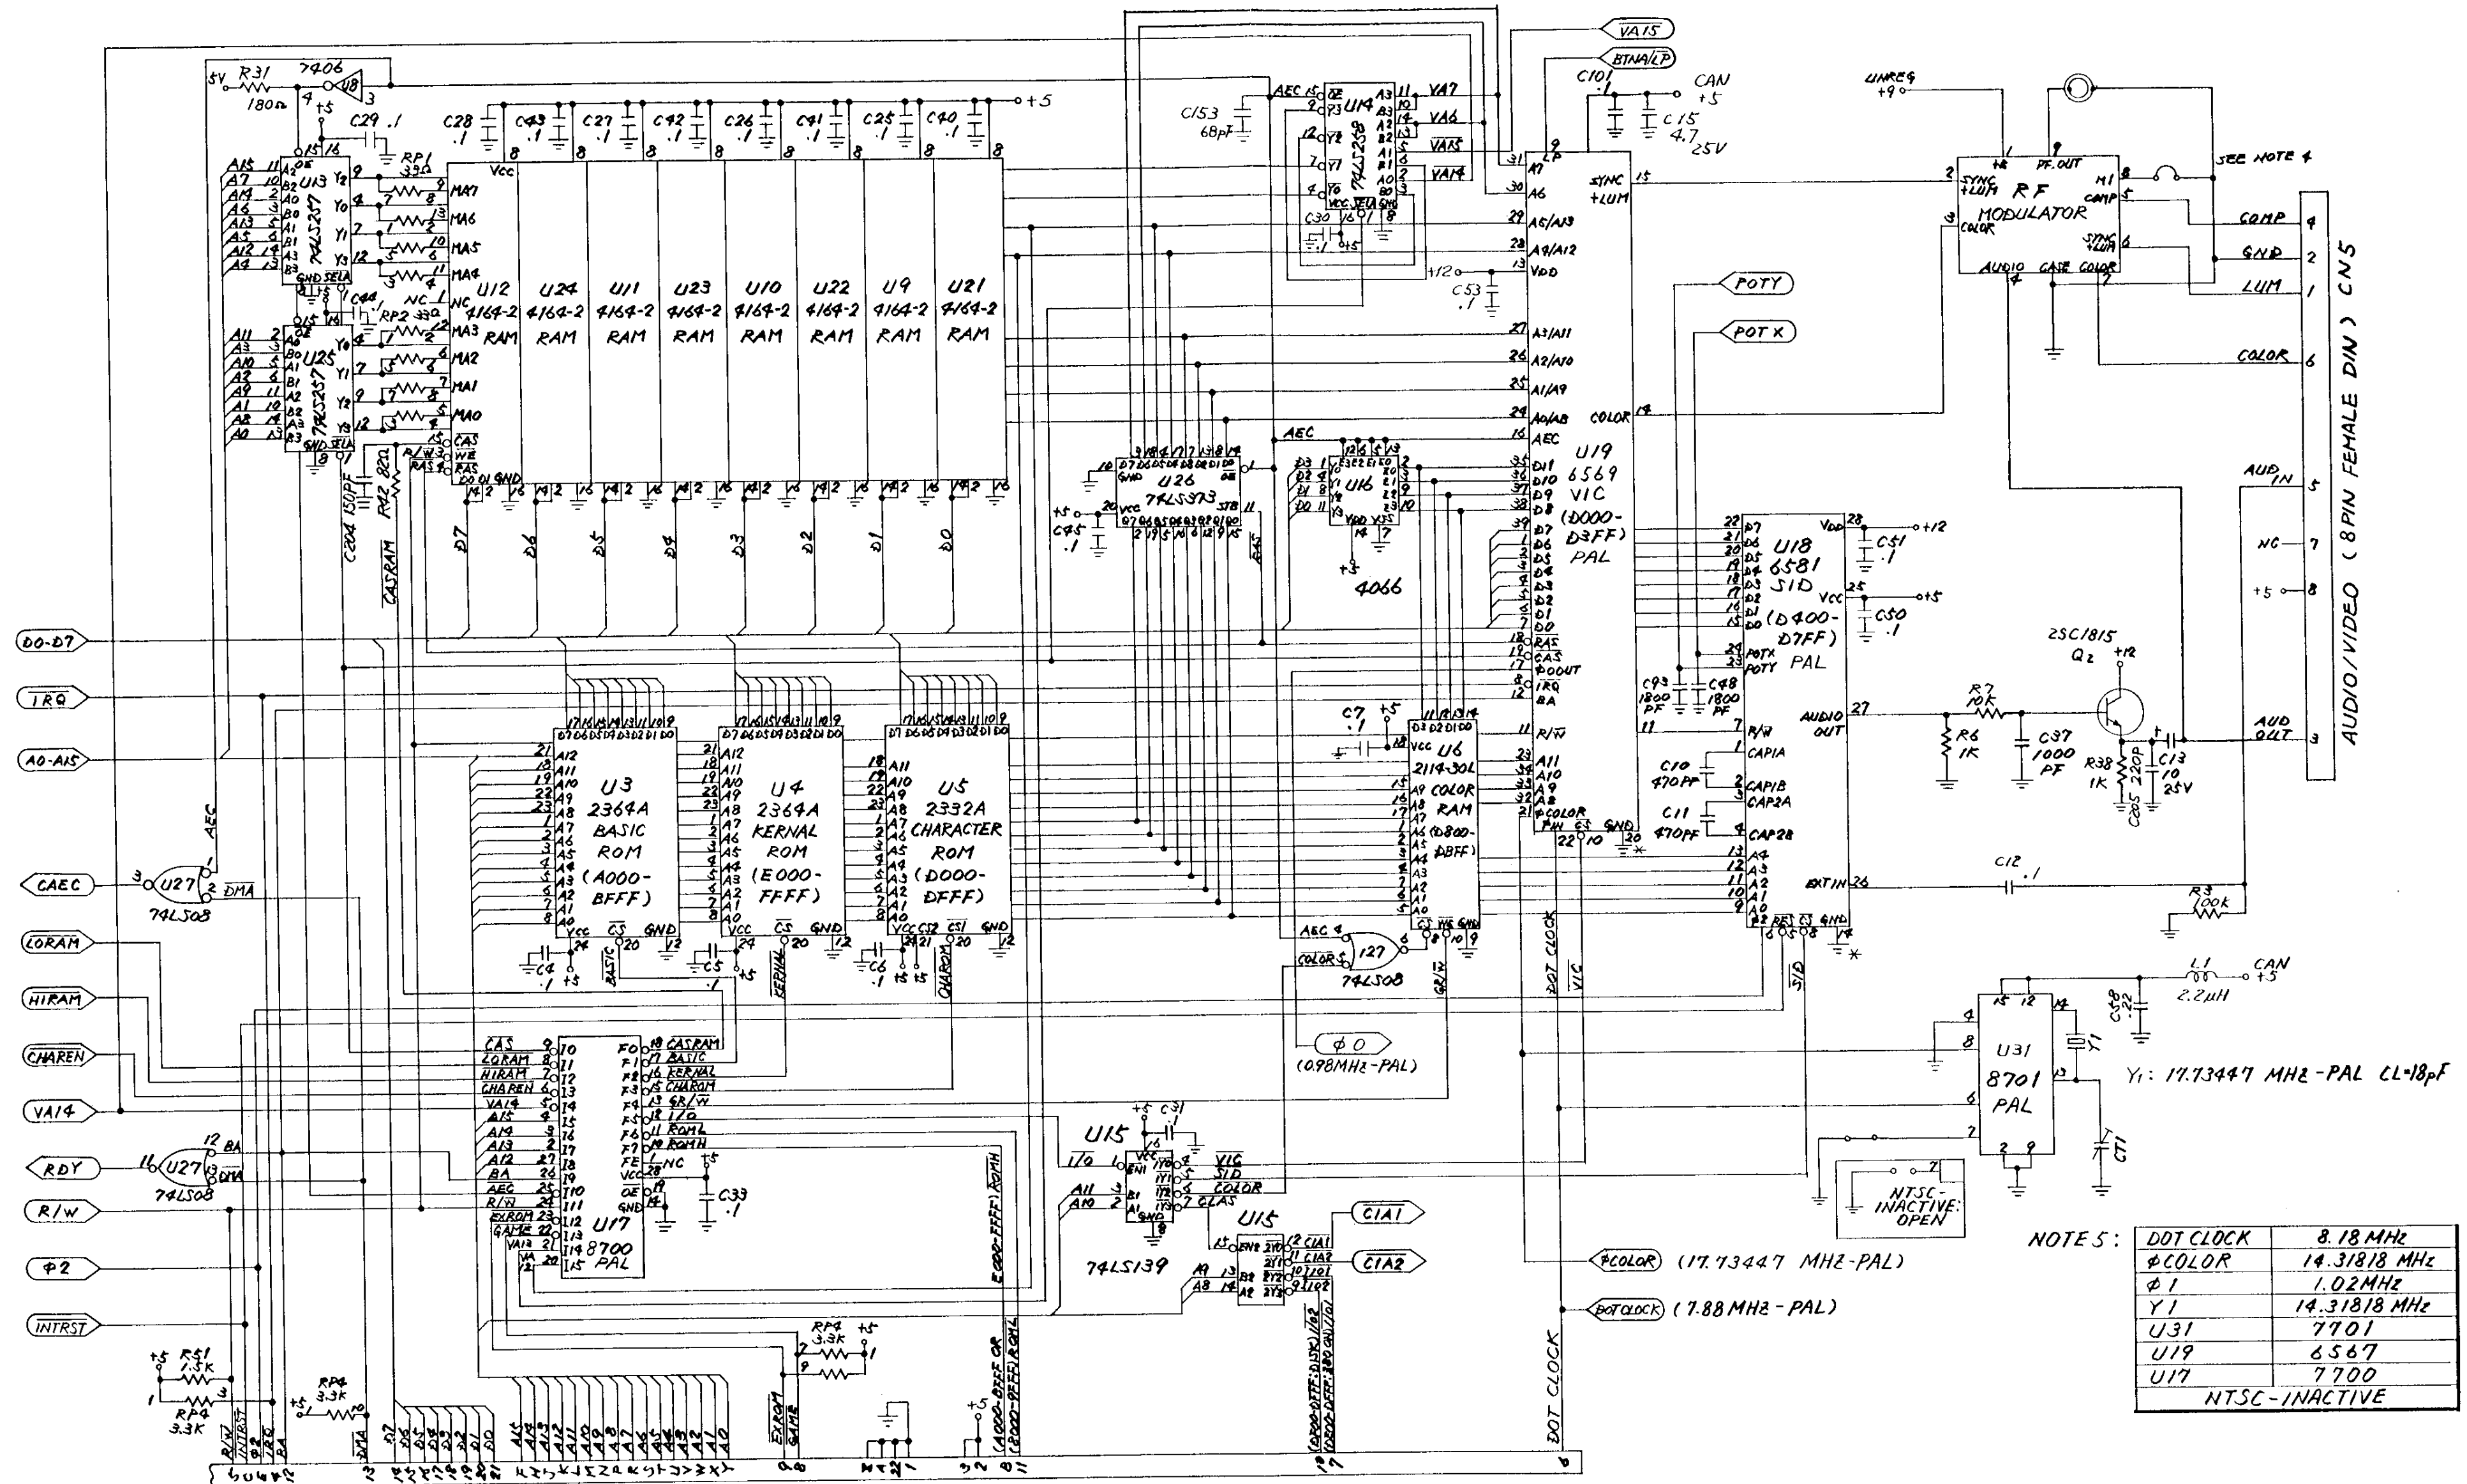


CARTRIDGE/EXPANSION (44PIN FEMALE) CN6

NOTES:

DOT CLOCK	8.18 MHz
ΦCOLOR	14.31818 MHz
Φ1	1.02 MHz
Y1	14.31818 MHz
U31	7701
U19	6567
U17	7700
NTSC-INACTIVE	

# Retrocomputing

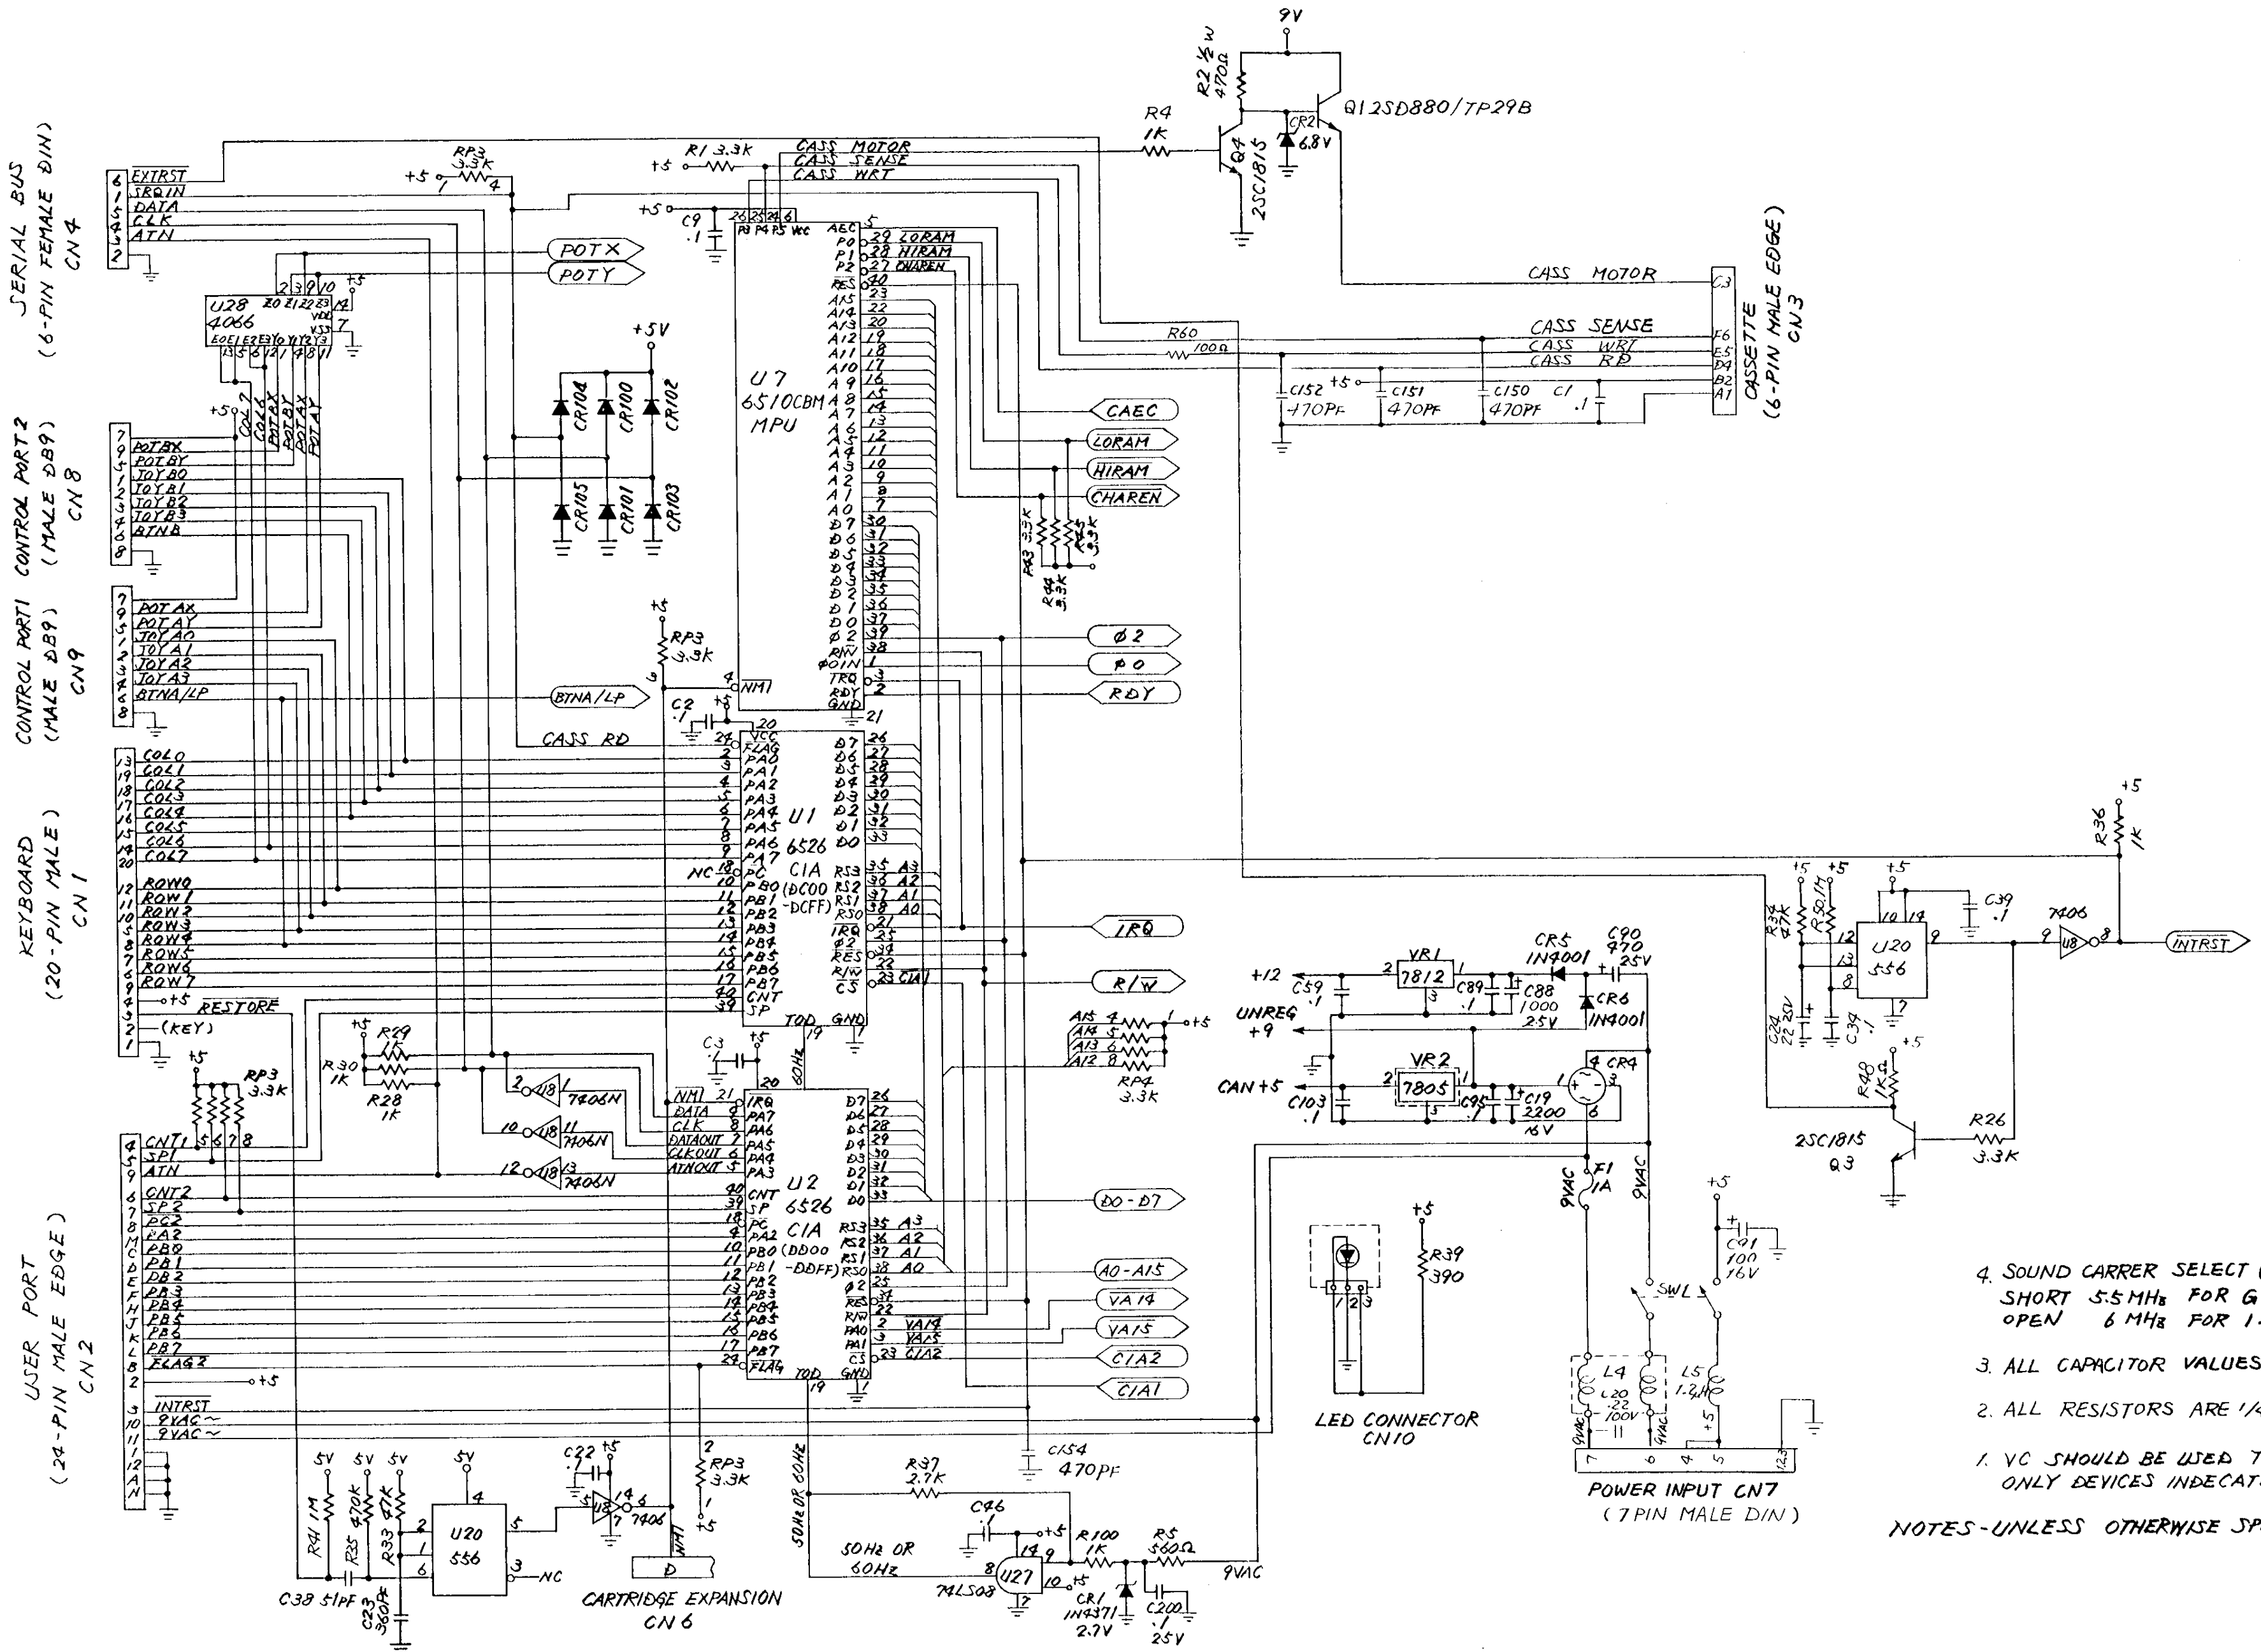

- 4. SOUND CARRIER SELECT (PAL ONLY)  
SHORT 5.5 MHz FOR G.PAL  
OPEN 6 MHz FOR I.PAL
- 3. ALL CAPACITOR VALUES ARE IN MF
- 2. ALL RESISTORS ARE 1/4 WATT ± 5%
- 1. VC SHOULD BE USED TO DRIVE ONLY DEVICES INDECATED.

NOTES-UNLESS OTHERWISE SPECIFIED: